

PFC/JA-83-19

MEASUREMENT OF THE D-D FUSION NEUTRON ENERGY SPECTRUM AND
VARIATION OF THE PEAK WIDTH WITH PLASMA ION TEMPERATURE

W. A. Fisher, S. H. Chen, D. Gwinn, R. R. Parker

Plasma Fusion Center
Massachusetts Institute of Technology
Cambridge, MA 02139

March 1983

This work was supported by the U.S. Department of Energy Contract No. DE-AC02-78ET51013. Reproduction, translation, publication, use and disposal, in whole or in part by or for the United States government is permitted.

By acceptance of this article, the publisher and/or recipient acknowledges the U.S. Government's right to retain a non-exclusive, royalty-free license in and to any copyright covering this paper.

Measurement of the d-d fusion neutron energy spectrum
and variation of the peak width with plasma ion temperature

W. A. Fisher*, S. H. Chen**, D. Gwinn†, R. R. Parker†

Abstract

We report a set of neutron spectrum measurements made at the Alcator C tokamak under ohmic heating conditions. It has been found that the width of the D-D fusion neutron peak increases with the plasma ion temperature consistent with the theoretical prediction. In particular the neutron spectra resulting from the sum of many plasma discharges with ion temperatures of 780 eV and 1050 eV have been obtained. The width for the 780 eV case is $64 \pm 9, -11$ keV and that of the 1050 eV case, $81 \pm 10, -14$ keV FWHM, corresponding to ion temperatures of 740 eV and 1190 eV respectively.

*Nuclear Engineering Department, Massachusetts Institute of Technology, Cambridge, MA 02139

Present address: National Nuclear Corp. 1904 Colony St., Mountain View, CA 94043

**Nuclear Engineering Department, Massachusetts Institute of Technology, Cambridge, MA 02139

†Plasma Fusion Center, Massachusetts Institute of Technology, Cambridge, MA 02139

The measurement of the neutron spectrum emitted from a thermonuclear D-D plasma can serve as a valuable diagnostic tool. In an ohmically heated tokamak such as Alcator C, the plasma ion velocity distribution is known to be essentially Maxwellian. Lehner and Pohl [1] have shown that the neutron energy spectrum due to a three dimensional Maxwellian ion distribution is Gaussian in shape and has a full width at half maximum (FWHM) given by

$$\Delta E = 82.5 [kT]^{1/2} \quad (1)$$

where the width and ion temperature (kT) are both in keV. This work reports on two sets of measurements made at two different ion temperatures which show agreement with Eqn. 1.

A number of measurements of neutron spectra from tokamak produced plasmas have been reported recently [2-6]. Most of the measurements were for beam heated plasmas with ion temperatures greater than or near 2 keV [2,5,6]. Strachan et al., [3], reported a spectrum during ohmic heating at the Princeton Large Torus, (PLT), but the 2.45 MeV fusion peak was distorted by non-thermonuclear sources of neutrons. One measurement of the neutron spectrum during ohmic heating at Alcator C was reported before ours [4], but the resolution at 2.45 MeV was not sufficient to obtain the true width of the peak. To our knowledge, this is the first report of a successful measurement of the 2.45 MeV peak width for an ohmically heated tokamak plasma. The measurement has been possible at Alcator C at this time for four reasons: 1) The ratio of the number of fusion neutrons to non-fusion neutrons is more than two orders of magnitude higher than the ohmic heating case mentioned above [3], because the plasma density at Alcator C is an order of magnitude

higher than that of PLT. 2) A substantial improvement has been obtained in the 2.5 MeV peak count rate performance as compared to reference [2] due to better thermal neutron shielding of the detector. 3) While the resolution is similar to that of reference [2], it is substantially better than the measurement of Pappas et al. at Alcator C [4]. 4) Neutron production rates at Alcator C are now large enough that the ion chamber used in references [2],[3],[5] could be used.

The neutron spectrometer system used for these measurements is described in detail in references [7] and [8]. It utilizes a ^3He ionization chamber [9] as the neutron detector.

Figure 1 shows a comparison between a pair of neutron spectra; the top is due to a $\text{Li}(p,n)\text{Be}$ accelerator neutron source and the bottom is due to a sum of 303 plasma discharges. The energy resolution of the spectrometer inferred from the calibration peak is 46 keV FWHM. The neutron source line width is estimated to contribute less than 10 keV to the FWHM. The energy calibration at 2.45 MeV has an uncertainty of 10 keV. The small peak near 2.0 MeV in the calibration spectrum is due to an excited state of Be.

This calibration spectrum is a good indicator of the spectrometer response function to 2.45 MeV neutrons. The peak corresponding to 2.45 MeV neutrons is indicated by an arrow in the figure. The continuum between 2.5 and 1.7 MeV is due to neutrons from the reaction $^3\text{He}(n,p)\text{T}$, in which the entire energy of the proton and triton is not collected in the ion chamber. The shoulder beginning at 1.7 MeV is due to proton recoils in the ion chamber and the shoulder beginning 0.8 MeV is due to

^3He recoils. A peak due to thermal neutrons, which corresponds to an energy of 0.76 MeV deposited in the chamber occurs at 0 MeV, is an order of magnitude larger than the 2.5 MeV peak and has not been included in the figure. The ratio of the number of counts from the energy range of 1.15 to 2.25 MeV to the energy range from 2.25 to 2.6 MeV has been computed for both cases. For the calibration this ratio was 1.9 and for the fusion spectrum the ratio is 1.4. The similarity of the plasma neutron spectrum and the calibration spectrum indicate that the bulk of the neutrons produced in the plasma are from D-D reactions.

As might be noticed from the plasma spectrum in Fig. (1), a large number of plasma discharges were required to obtain even moderate statistics. This was primarily due to the low intrinsic efficiency of the ion chamber, and to the present neutron production rate of Alcator C plasmas. Thus only a few counts have been obtained in the D-D fusion peak per plasma discharge. The count rate was as high as 11 counts in a 250 msec counting time during a single discharge. The total ion chamber count rate, which includes counts from gamma rays, thermal neutron capture, and neutron elastic scatter was 4×10^3 counts per second for the same discharge. This rate is very near the maximum count rate at which the ion chamber can be operated [2],[10]. While this is an improvement over a previous design [2], at least 20 plasma discharges are required and measurements of this type will require relatively long data acquisition times even if the neutron production rate of fusion devices is increased.

In order to determine whether the width of the D-D peak varied as described by Eqn. (1), neutron spectra for two sets of plasma discharges

with different ion temperature were measured. The plasma conditions are summarized in Table I. Note that in the low T_i case the central ion temperature is 780 eV and in the high T_i case, 1050 eV. The ion temperature has been determined from the total neutron rate and neutral particle charge exchange diagnostics [11]. Both these diagnostics have measurement uncertainties of 10% and the temperatures represent the maximum temperature at the center of the plasma during each discharge. The width determined from our measurements is an average over the spatial and time distributions of the plasma ion temperature. The effect of this average has been calculated for the discharges above, and we have found that the ion temperature corresponding to the measured peak width is approximately 0.8 times the central ion temperature and is insensitive to plasma parameters, particularly to the value of limiter q . The shot to shot variation in the temperature was about 10% to 15%.

A standard pulse height analysis system has been used with the ion chamber to obtain the neutron spectra [7][8]. To provide sufficient resolution on a pulser generated peak used to measure noise pick-up during the plasma discharge, it was necessary to collect spectra such that there were approximately 40 channels at the FWHM of the 2.45 MeV peak. Because there were so few total counts in the peak, (generally less than 300) it is helpful to reduce the number of channels by adding groups of channels together until about five of these collapsed channels occur at the FWHM of the peak. The two data sets are plotted after such a collapse in Fig. (2). This method of presentation emphasizes the difference between the low and high temperature cases, but is not well suited for quantitative analysis.

Peak width is determined following the method suggested by Cash [12].

The data is fit by minimizing the statistic,

$$C = 2 \sum_{i=1}^N [y_i - n_i \ln(y_i)] \quad (2)$$

where n_i is the number of counts in channel i , N the number of channels, and y_i is the value of the fitting function evaluated for the channel i . The fitting function used is

$$F(i) = P_1 e^{-0.5 \left(\frac{P_1 - i}{P_3} \right)^2} + P_1 P_4 W e^{-0.707 \left(\frac{P_2 - i}{P_5} \right)^2} + P_6 W$$

$$W = 0.5 \operatorname{Erfc} \left(1 - \frac{P_2 - i}{P_3} \right) \quad (3)$$

where P_1 is the magnitude, P_2 the centroid, and P_3 the σ of the Gaussian representing the neutron peak, and Erfc is the error function. Parameters P_4 and P_5 are needed to fit the response function of the ion chamber and are fixed from the calibration spectrum, and P_6 is a background term needed to model the background on the low energy side of the peak. In the minimization, P_1 - P_3 and P_6 are free parameters. The confidence limits of the fit are calculated as suggested by Cash [12]. The error bars shown in Fig. (3) are based on a 68% confidence limit.

The contribution due to the ion temperature can be found, once the peak width and associated uncertainty is known, by using the relation

$$\sigma_n = [\sigma_{\text{peak}}^2 - \sigma_{\text{noise}}^2 - \sigma_{\text{resolution}}^2]^{1/2} \quad (4)$$

where σ_n is the thermal broadening, σ_{peak} is the fitted peak width, σ_{noise} is the noise contribution determined from the pulser peak, and

$\sigma_{\text{resolution}}$ is the measured resolution of the detector. The central ion temperature is calculated using Eqn. (1) and the time and spatial averaging correction discussed earlier.

The corrected peak width is plotted against the central ion temperature in Fig. (3). The dotted line represents the expected variation in the width for ion temperatures measured by the total neutron rate and neutral particle charge exchange diagnostics. The equivalent central ion temperature determined from the line width is shown on the scale to the right of the figure. The width was determined to be $64 \pm 9, -11$ keV for the "low" T_i case and $81 \pm 10, -14$ keV for the "high" T_i case. This may be compared to the predicted values of 66 for the "low" T_i case and 76 for the high T_i case. The constant in Eqn. (1) can be estimated from the data, assuming a value of 0 for the width at a 0 keV ion temperature, and is 90 ± 10 . The agreement is consistent within the run-time limited statistical accuracy of the measurement.

These measurements demonstrate the feasibility of using the line width technique to determine both the absolute ion temperatures and changes as small as 200 eV and provide evidence that the neutrons are thermonuclear in origin. Since high resolution is essential to this measurement, a critical aspect of this work was the development of a detector shielding and collimation system allowing the ion chamber used to be operated at a tolerable count rate for the 2.45 MeV peak. Despite this improvement, the technique of obtaining the ion temperature from the line width of the 2.45 MeV peak does not presently constitute a routine diagnostic. Obtainable plasma parameters dictate that at least 25 identical discharges are required to determine a temperature within statisti-

cal significance. The maximum count rate of the detector could be increased by use of a shorter amplifier time constant, but the resultant degradation of resolution would make the system unsuitable for 1 keV ion temperatures. Future machines, with hotter plasmas, longer discharges, and increased access may find this technique of substantial value. Additionally, the sensitivity of the spectrum shape to non-thermal ion distribution functions is of great value in evaluating the degree to which the ions approximate a Maxwellian distribution. This feature should prove especially useful in radio frequency heated plasma discharges.

We would like to thank the staffs of the MIT Alcator C fusion group, Francis Bitter Magnet Laboratory, and MIT Reactor Machine shop for their assistance. Also, we would like to thank Dr. D. Slaughter of the Lawrence Livermore National Laboratory for his assistance in the calibration of the detector.

This work was supported by U.S. Department of Energy Contract No. DE-AC02-78ET51013.

REFERENCES

1. G. Lehner and F. Pohl, "Reaktionsneutronen als Hilfsmittel der Plasma-diagnostik", Zeitschrift für Physik 207 83-104 (1967).
2. J. D. Strachan et al., "Measurement of the Neutron Spectra from Beam-heated PLT Plasmas", Nature 279 626-628 (1979).
3. J. D. Strachan and D. L. Jassby, "Observation of Electrodisintegration Neutron Production in the Princeton Large Tokamak", Trans. Am. Nucl. Soc. 26 509 (1977).
4. D. S. Pappas, F. J. Wysocki, R. J. Furnstahl, "D-D Neutron Energy Spectra Measurements in Alcator C", M.I.T. Plasma Fusion Center report PFC/RR-82-14 (August 1982).
5. G. Zankl et al., "Neutron Flux Measurements around the Princeton Large Tokamak", Nucl. Instr. and Meth. 185 321-329 (1981).
6. K. Steinmetz, K. Hubner, and Asdex team, "Fusion Neutron Emission Studies on Beam Heated Asdex Plasmas", in "Extended Synopses", 9th International Conference on Plasma Physics and Controlled Nuclear Fusion Research, IAEA-CN-41, Baltimore, p. 4 (1982).
7. W. A. Fisher, "D-D Fusion Neutron Spectra Measurements and Ion Temperature Determination at Alcator C", ScD thesis submitted to the Department of Nuclear Engineering, Massachusetts Institute of Technology (1983).
8. W.A. Fisher et al. "A Fast Neutron Spectrometer for D-D Fusion Neutron Measurements at the Alcator C Tokamak" submitted to Nucl. Instrum.

Methods in May 1983.

9. Model FNS-1, Seforad-Applied Radiation LTD. Emekhayarden, Israel.
10. H. Franz et al. "Delayed-Neutron Spectroscopy with ^3He Spectrometers", Nucl. Instrum. Methods 144 253-261 (1977).
11. EQUIPE TFR, "Review Paper, Tokamak Plasma Diagnostics", edited by C. De Michelis, G. Magyar, Nucl. Fusion 18 647-719 (1978).
12. W. Cash "Parameter Estimation in Astronomy Through Application of the Likelihood Ratio" Astrophys. J. 228 939-947 (1979).

	"Low" T_i Case	"High" T_i Case	Unit
Number of discharges	169	38	
Plasma current	350-400	550-625	kA
Toroidal field	80	110	kG
Line averaged electron density	2.5×10^{20}	2.3×10^{20}	m^{-3}
T_i from neutron rate and charge exchange	780	1050	eV


TABLE I. Plasma conditions for "low" and "high" T_i cases.

FIGURE CAPTIONS

Fig. 1. Neutron Spectra from ^3He spectrometer. Here the Q value of the $^3\text{He}(n,p)\text{T}$ reaction has been subtracted from the energy scale. Top, the spectrum due to the sum of 303 plasma discharges. Bottom, the spectrum due to a calibration neutron source from the $\text{Li}(p,n)\text{Be}$ reaction. The proton energy was adjusted to yield 2.45 MeV neutrons. The small peak is due to an excited state of Be. The arrow shows the position of the 2.45 MeV peak.


Fig. 2. Neutron spectrum data for low and high T_i cases. Top, high T_i case, bottom, low T_i case. The original number of data channels has been reduced by a factor of nine for presentation purposes. The curve in the lower figure is the result of fitting the original data, using the method of Cash [12].

Fig. 3. Reduced width of the 2.45 MeV fusion peak and corresponding temperature plotted against the central ion temperature determined from the total neutron rate and neutral particle charge exchange diagnostics. The dotted line shows the expected dependence.

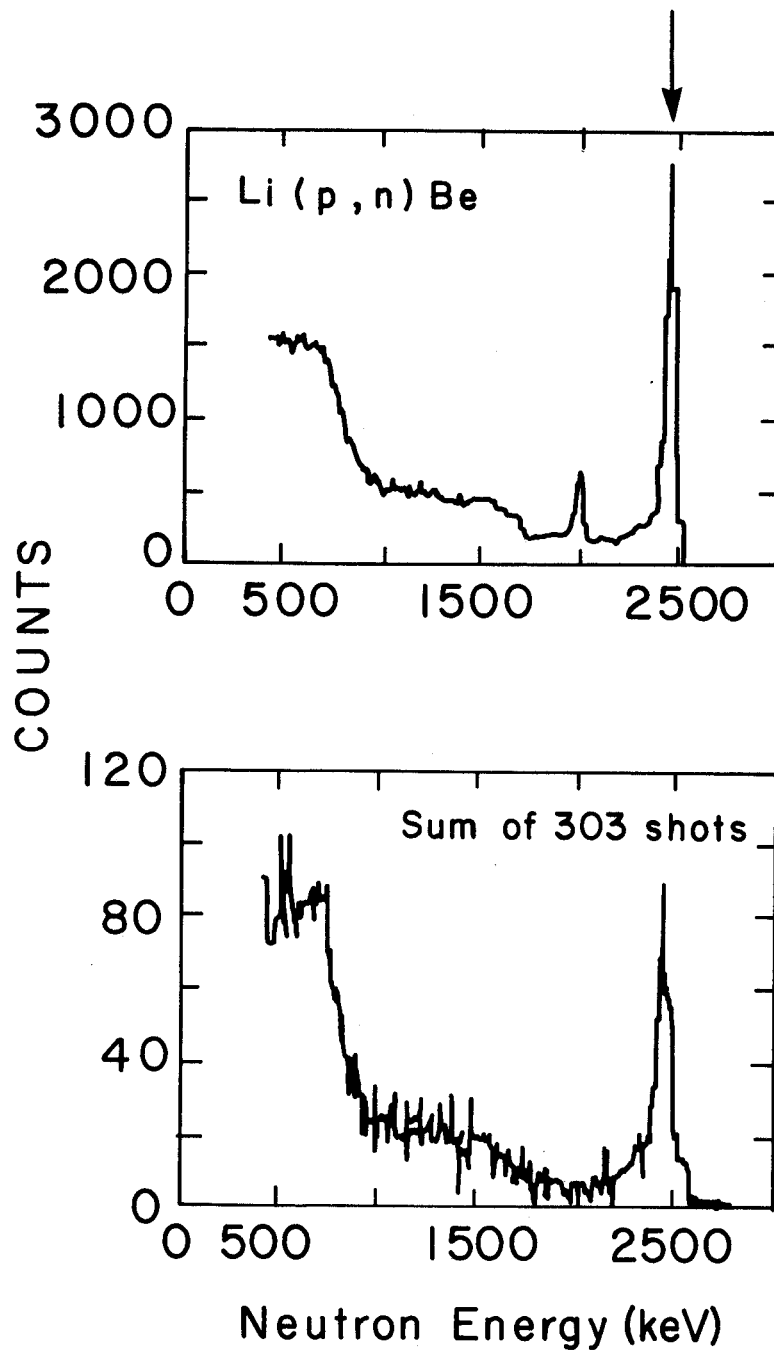


PFC-8351

FIGURE 1

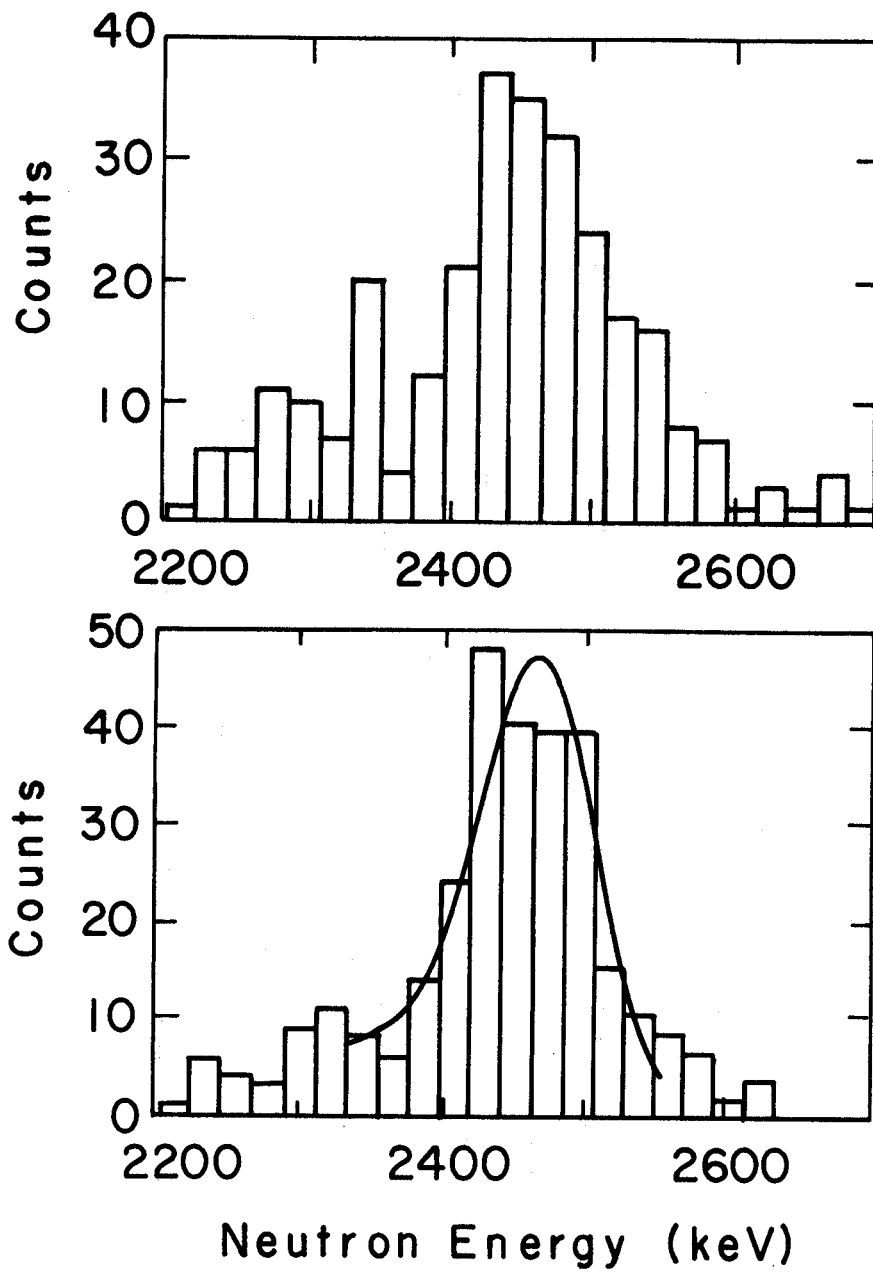

PFC - 8356

FIGURE 2

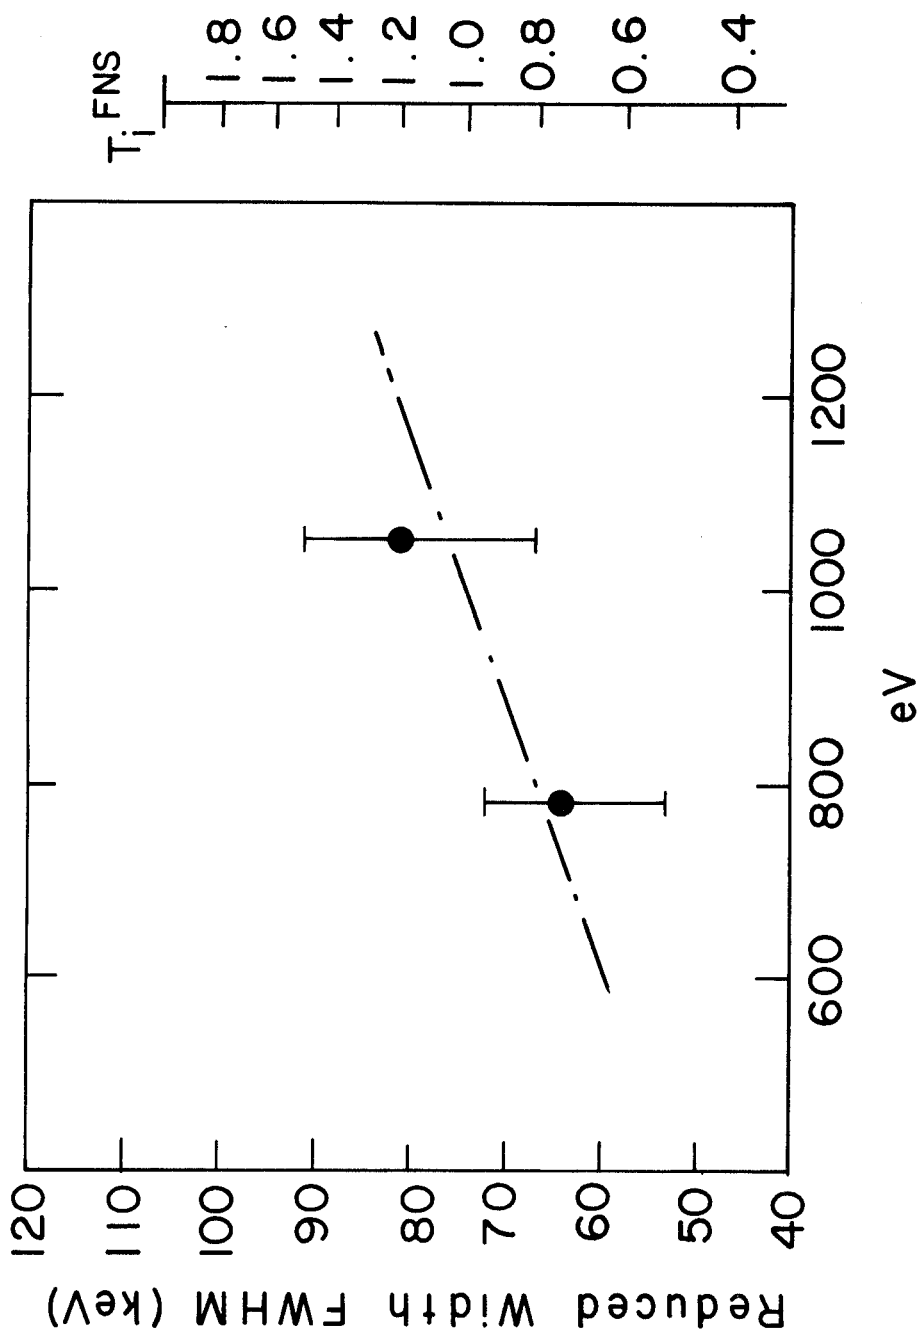

Central Ion Temperature

PFC-8357

FIGURE 3