

MIT Open Access Articles

Measurements of the neutron-proton and neutron-carbon total cross section from 150 to 800 keV

The MIT Faculty has made this article openly available. **Please share** how this access benefits you. Your story matters.

Citation: Daub, B. H. et al. "Measurements of the Neutron-proton and Neutron-carbon Total Cross Section from 150 to 800 keV." Physical Review C 87.1 (2013). ©2013 American Physical Society

As Published: <http://dx.doi.org/10.1103/PhysRevC.87.014005>

Publisher: American Physical Society

Persistent URL: <http://hdl.handle.net/1721.1/78278>

Version: Final published version: final published article, as it appeared in a journal, conference proceedings, or other formally published context

Terms of Use: Article is made available in accordance with the publisher's policy and may be subject to US copyright law. Please refer to the publisher's site for terms of use.



Measurements of the neutron-proton and neutron-carbon total cross section from 150 to 800 keVB. H. Daub,^{1,*} V. Henzl,^{1,†} M. A. Kovash,² J. L. Matthews,¹ Z. W. Miller,² K. Shoniyoov,² and H. Yang²¹*Laboratory for Nuclear Science and Department of Physics, Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, USA*²*Department of Physics and Astronomy, University of Kentucky, Lexington, Kentucky 40506, USA*

(Received 28 October 2012; published 25 January 2013)

There have been very few measurements of the total cross section for np scattering below 500 keV. To differentiate among NN potential models, improved cross section data between 20 and 600 keV are required. We measured the np and nC total cross sections in this energy region by transmission; a collimated neutron beam was passed through CH_2 and C samples and transmitted neutrons were detected by a BC-501A liquid scintillator. Cross sections were obtained with a precision of 1.1–2.0% between 150 and 800 keV using ratios of normalized neutron yields measured with and without the scattering samples in the beam. In energy regions where they overlap, the present results are consistent with existing precision measurements and fill in a significant gap in the data between $E_n = 150$ and 500 keV.

DOI: [10.1103/PhysRevC.87.014005](https://doi.org/10.1103/PhysRevC.87.014005)

PACS number(s): 28.20.Cz, 25.40.Dn

I. INTRODUCTION

Nucleon-nucleon interactions and NN potential models are an important representation of the strong interaction and a component of the theory of nuclei. Measurements of the two-body interaction in pp and np reactions have been applied to studies of the structure and dynamics of light nuclei as well as to testing of the charge, spin, and isospin dependence of the strong nuclear force [1].

Additionally, np scattering data are applicable to the detection of neutrons in organic scintillators below 2 MeV, where the primary mechanism for depositing energy in the scintillator is np elastic scattering. Therefore, determining the efficiency of a neutron detector using either Monte Carlo or analytical methods requires accurate knowledge of the np elastic cross section. Since the $np \rightarrow d\gamma$ cross section is typically 5 orders of magnitude smaller than the elastic cross section in this energy range [2], measurement of the total np cross section effectively yields the elastic cross section.

However, the relevant data [3–6], plotted with the ENDF/B-VII.1 tabulation [2] in Fig. 1, reveal a lack of precise measurements between 150 and 500 keV. Previous measurements all employed the method of neutron transmission to determine the total cross section, using polyethylene and carbon samples to account for the carbon contribution and to obtain the np cross section. We focused on the range between 150 and 800 keV, covering the region below 500 keV where there is very limited data.

II. EXPERIMENTAL PROCEDURE

We measured the total cross section for neutron scattering from polyethylene and pure carbon samples using the method of neutron transmission. The neutron beams were produced via the ${}^7\text{Li}(p,n){}^7\text{Be}$ reaction, with a 1.875-MHz pulsed proton

beam produced by the Van de Graaff accelerator located at the University of Kentucky. The Q value for this reaction was -1.644 MeV [7]. The neutron production target was composed of 20- μm -thick LiF on a tantalum backing; this thickness was chosen such that 2.25-MeV protons would lose approximately 50 keV before exiting the target. Using a thin target limited the spread of neutron energies and reduced the backgrounds.

The neutrons were collimated by a copper shield, with a 6.35-cm opening and a 50.8-cm thickness. The beam was additionally defined by a wax collimator with an opening matched to that of the copper shield and tapered down to a 2.2-cm opening. The sample was placed in the beamline past this collimation. The neutrons were detected by a 13.7-cm-diameter BC-501A liquid scintillator, which was housed in a lead and wax shield, with a 4.4-cm lead lining in the internal aperture and a 7-cm wax lining around the lead. The experimental setup is shown in Fig. 2. The geometry of the collimation resulted in a beam size smaller than that of both the samples and the neutron detector. This was tested by performing several runs where a sample was shifted by several centimeters off its centered position in the beam. These shifts did not produce any changes in the neutron yields, indicating that the neutron beam was confined to the central region of the samples. Previous experiments [3,4], in which the beam profile was larger than the detector, required an additional correction due to neutrons produced at angles outside the detector acceptance which scattered into the detector. In our geometry, this correction was not required.

The bombarding proton energies ranged from 2.00 to 2.55 MeV in 50-keV increments, yielding neutrons from 150 to 800 keV. This spacing produced minimal overlap of neutron energies, especially above a proton energy of 2.25 MeV. This resulted in an increase in the statistical uncertainty near neutron energies of 650, 700, and 750 keV. For proton energies above 2.25 MeV (neutron energies above 450 keV), a total of 4 h of data was taken at each proton energy. For proton energies below 2.25 MeV (neutron energies below 450 keV) a total of 8 h of data was taken at each proton energy. These additional statistics were collected to compensate for the decreasing

*daubb@berkeley.edu; Currently at University of California, Berkeley, Berkeley, CA.

[†]Currently at Los Alamos National Laboratory, Los Alamos, NM.

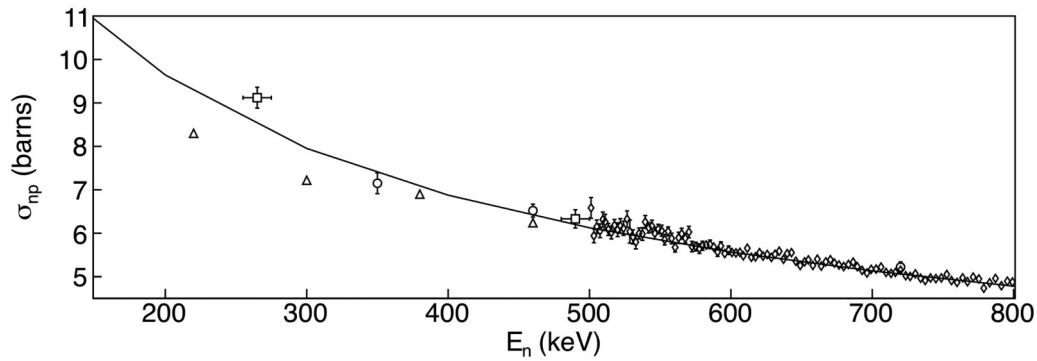


FIG. 1. Existing np total cross section measurements for neutron energies from 150 to 800 keV, measured by Frisch [3] (squares), Bailey *et al.* [4] (circles), Bretscher and Martin [5] (triangles), and Clement *et al.* [6] (diamonds) plotted with the ENDF/B-VII.1 tabulation (solid line) from Hale and Johnson [2].

${}^7\text{Li}(p, n){}^7\text{Be}$ cross section and the increasing np total cross section.

Four polyethylene and three carbon samples were used, in addition to the empty position used to determine the yield with no sample in the beam. A caliper was used to measure each target dimension with an uncertainty of 0.25 mm. The mass was determined with a scale to an accuracy of 10 mg. The polyethylene samples were rectangular prisms, with nominal length and widths of 7.6 and 5.1 cm, with a thickness varying from 0.5 to 3.0 cm. The carbon targets were cylindrical, with a diameter of 4.8 cm and a thickness varying from 3.1 to 6.1 cm. The nominal thickness and areal density of each sample are given in Table I. Approximately 30% of the transverse area of each sample was exposed to the neutron beam.

The samples were mounted on a remotely controlled wheel which could position up to 12 samples in the neutron beam. During each 2-h run, the wheel would automatically switch which target was in the beam at preprogrammed intervals,

resulting in a series of irradiations between 1 and 7 min long. Feedback signals from the wheel indicated when samples were being moved and which sample was in the beam at a given moment. By using these short intervals, the yields from each irradiation of the samples could be compared under similar beam conditions, eliminating potential variations due to beam current fluctuations or the condition of the LiF target. At each of the 12 positions, the samples were mounted onto a smaller wheel. When in the beam position, a second motor rotated this smaller wheel so as to average over possible nonuniformities in thickness.

Additionally, a sulfur sample was used to calibrate the neutron energy. With its multiple resonances in our energy range, we can use the observed decreases in yield and the maximum neutron energy for each proton beam energy to calibrate the absolute time of flight. The neutron energy spectrum with a sulfur sample for $E_p = 2.00$ MeV is shown in Fig. 3.

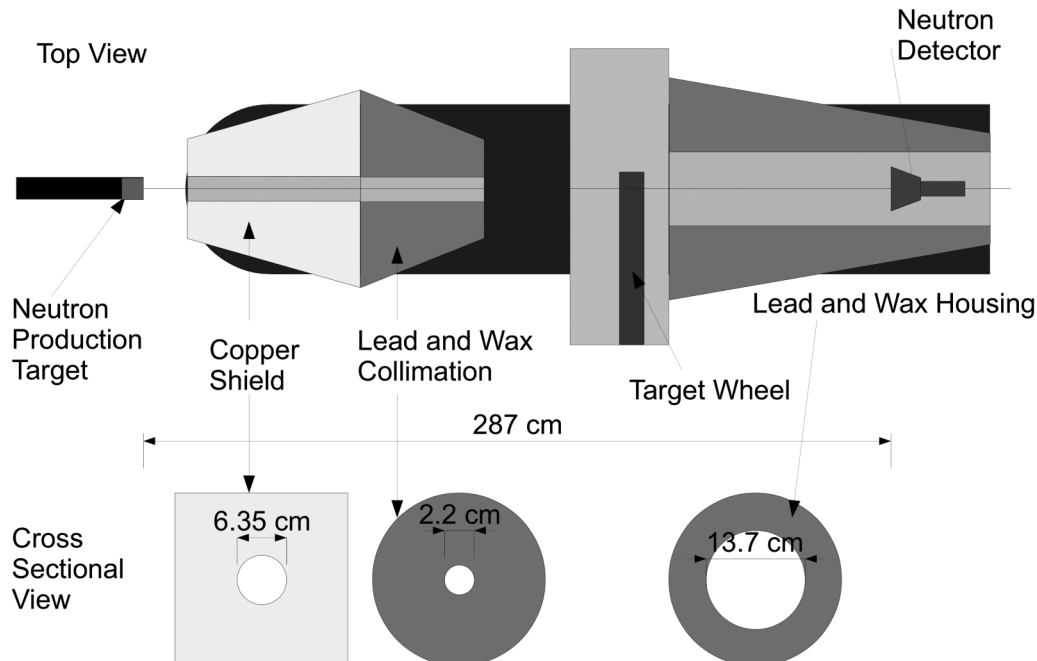


FIG. 2. Detector and shielding configuration.

TABLE I. CH₂ and C sample thicknesses.

Material	Nominal thickness (cm)	τ (g/cm ²)
CH ₂	0.5	0.479 ± 0.003
CH ₂	1.0	0.959 ± 0.006
CH ₂	2.0	1.93 ± 0.01
CH ₂	3.0	2.91 ± 0.02
C	3.1	4.89 ± 0.02
C	4.6	7.24 ± 0.03
C	6.1	9.42 ± 0.04

The data were recorded event by event, using NIM and CAMAC electronics. The dead time ranged from 5 to 40%, depending on the event rate.

III. ANALYSIS

We used pulse shape discrimination in the neutron detector to separate neutrons and γ rays, thus significantly reducing the background. The pulses from the liquid scintillator were split and were recorded in separate Analog to Digital Converters (ADCs) using a long gate (500 ns) and a short gate (100 ns). The short-gated pulse height versus the long-gated pulse height is shown in Fig. 4. The upper and lower broad bands correspond to γ rays and neutrons, respectively. They merge at small pulse heights, where the difference in the long and short portions of the pulse is too small to separate, but using a conservative cut allows the elimination of all higher-energy γ rays. Figure 5 shows the neutron time-of-flight spectrum for $E_n = 450$ to 500 keV with no conditions (solid) and the pulse shape discrimination condition (dashed). The background outside the neutron peak (270–300 ns) is reduced by 75% while the neutron yield is unaffected. Neutron yields were determined in 10-keV bins from 150 to 800 keV, and the integrated live current was recorded for each sample irradiation to normalize the neutron yields.

To extract a cross section from the yields from each sample, we normalized the neutron yields by the proton beam current:

$$\sigma_C = \frac{1}{\tau_c} \ln \frac{(Y/Q)^{\text{out}}}{(Y/Q)^C}, \quad (1)$$

$$\sigma_p = \frac{1}{\tau_p} \ln \frac{(Y/Q)^{\text{out}}}{(Y/Q)^{\text{CH}_2}} - \frac{\sigma_C}{2}, \quad (2)$$

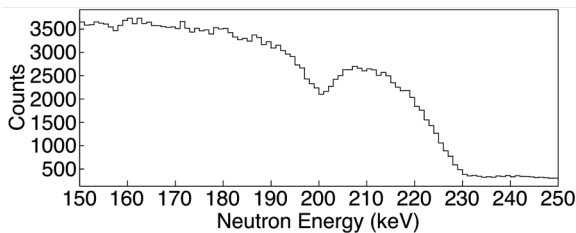


FIG. 3. Neutron energy spectrum with a sulfur sample for $E_p = 2.00$ MeV. This corresponds to a maximum neutron energy of 230 keV, and there is a visible decrease in counts associated with the sulfur resonance at $E_n = 203$ keV.

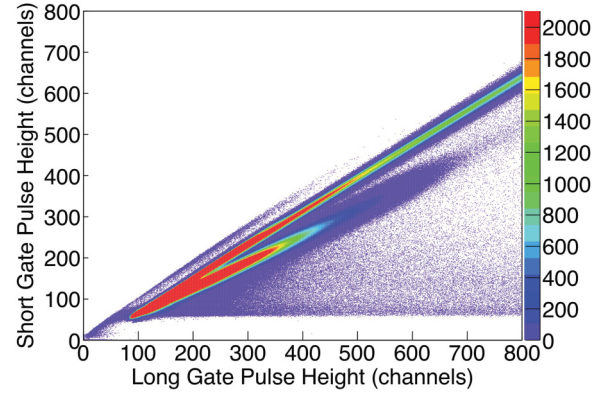


FIG. 4. (Color online) Neutron detector ADC outputs: short-gated pulse height versus long-gated pulse height. The upper broad band is γ rays; the lower band is neutrons.

where τ_p and τ_c are the sample thicknesses from Table I, Y is the neutron yield, and Q is the integrated live-time current. The carbon contribution of the polyethylene targets is subtracted, and the uncertainty in the nC cross section is included in the total uncertainty in the np cross section. Due to the long lengths of the CH₂ chains, the variation of the hydrogen to carbon ratio from 2 is insignificant compared to the other systematic uncertainties. These results do not require knowledge of the neutron detector efficiency nor the absolute beam flux. The proton beam current was integrated for each irradiation, and the dead time of the data acquisition system was precisely measured as a function of the event rate to determine the total live-time current.

The backgrounds were divided into two categories: the room background, which is independent of the time of flight, and the sample background, which is due to neutrons which scatter from the sample but are still detected. The room background can be measured from the data by fitting to the constant background outside the neutron time-of-flight peak. The sample background was determined by extrapolating to zero thickness. For each target, the cross sections measured at each energy were combined using a weighted average, in order to produce a single average cross section for the entire energy range. These average cross sections were then plotted versus target thickness and fitted with a linear function. The intercept of this linear function gave the average cross section at zero target thickness. By taking the ratio of the average cross section at zero thickness and the average cross section for each sample, we determined the correction for the background due to target thickness. These corrections ranged from 0.3% for the thinnest sample to 1.3% for the thickest sample. The corrected cross sections for each energy bin were then combined using a weighted average.

IV. RESULTS

Our results are shown in Fig. 6(a) for the np total cross section and in Fig. 7(a) for the nC total cross section. Existing np data [3–6] and the ENDf/B-VII.1 [2] tabulation are also

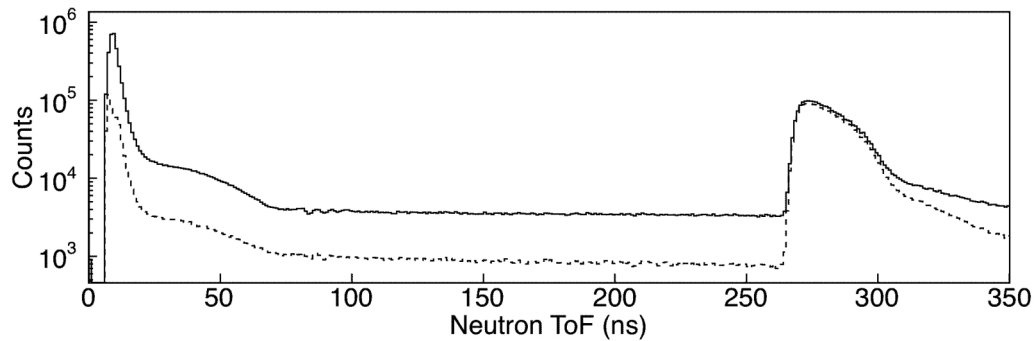


FIG. 5. Neutron time of flight for $E_n = 450$ to 500 keV with no conditions (solid line) and the pulse shape discrimination condition (dashed line). The γ flash is visible at 10 ns, with the neutron peak visible at 270 – 300 ns. With the pulse shape discrimination condition, the background is reduced by 75% outside the neutron peak.

shown in Fig. 6(a), and existing nC data [8–10] and the ENDf/HE-VI [11] tabulation are also shown in Fig. 7(a). Figures 6(b) and 7(b) show the difference between our experimental cross sections and the tabulations. Error bars are suppressed in the previous nC measurements for clarity in the plot; the uncertainty in these measurements is between 2.7 and 5% .

The total uncertainty in each of our measurements is in the range 1.1 – 2.0% . The systematic uncertainties included the measured masses and dimensions of the samples, listed in Table I, contributing 0.35% ; the characterization of the

beam and system dead time, contributing 0.5% ; and the background determination, contributing 0.5% . The statistical uncertainty was of the order of 0.4% . The uncertainties due to the target dimensions applied uniformly to all data points, while the statistical, beam, system dead time, and background uncertainties were determined for each sample irradiation.

V. DISCUSSION

To connect our measurements to NN potential models, we parametrize the s -wave neutron-proton elastic scattering cross

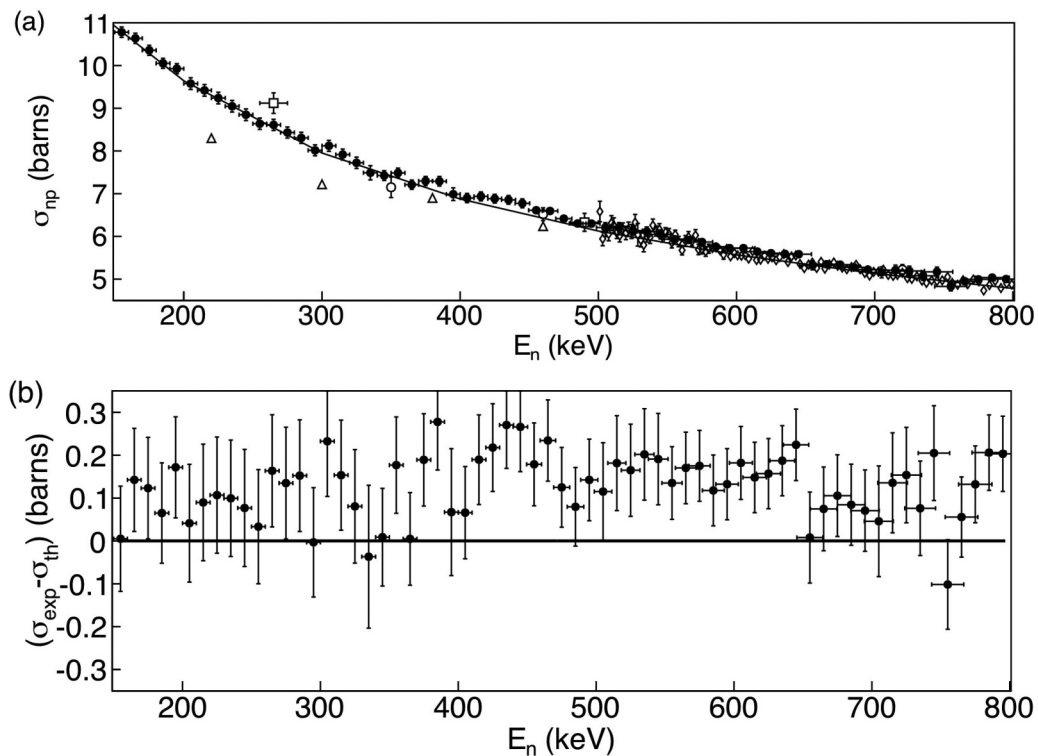


FIG. 6. (a) Results for the np total cross section measurements (solid circles) for neutron energies from 150 to 800 keV, plotted with ENDf/B-VII.1 tabulation (solid line) from Hale and Johnson [2] and previously measured np cross sections from 150 to 500 keV, measured by Frisch [3] (squares), Bailey *et al.* [4] (open circles), Bretscher and Martin [5] (triangles), and Clement *et al.* [6] (diamonds). (b) The difference between our experimental cross section and the ENDf/B-VII.1 tabulation. Error bars include the statistical and systematic errors added in quadrature, along with the contribution due to subtracting the experimental nC cross section.

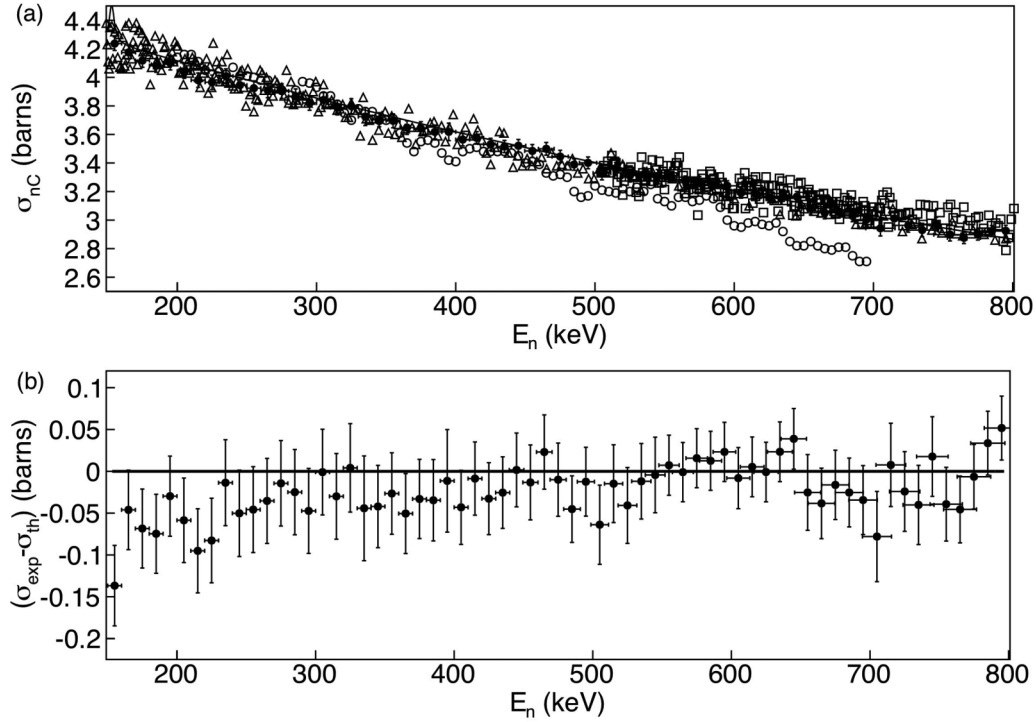


FIG. 7. Results for the nC total cross section measurements (solid circles) for neutron energies from 150 to 800 keV, plotted with the ENDf/HE-VI tabulation [11] and existing data, measured by Huddleston *et al.* [8] (squares), Wilenzick *et al.* [9] (open circles), and Uttley [10] (triangles). Error bars are suppressed in the previous nC measurements for clarity in the plot. (b) The difference between our experimental cross section and the ENDf/HE-VI tabulation. Error bars include the statistical and systematic errors added in quadrature.

section,

$$\sigma = \frac{3}{4}\sigma_t + \frac{1}{4}\sigma_s, \quad (3)$$

in terms of the triplet and singlet scattering lengths $a_{t,s}$ and energy-dependent effective ranges $\rho_{t,s}(0, T)$ [12,13]:

$$\sigma_d = \frac{4\pi}{[a_d^{-1} - \frac{1}{2}\rho_d(0, T)p^2]^2 + p^2}, \quad (4)$$

where the subscript d represents either t or s , $\rho_d(0, T)$ is the energy-dependent effective range, and T and p are the center of mass kinetic energy and momentum, respectively. Hackenburg [13] has recently revisited the problem of determining the zero-energy cross section and effective-range theory (ERT) parameters from data, including a consideration of the correlation between the singlet effective range and the triplet effective range. Measurements of the zero-energy np cross section, σ_0 [14,15], and the parahydrogen coherent scattering length, a_c [16,17], given by

$$\sigma_0 = \pi(3a_t^2 + a_s^2), \quad a_c = \frac{3}{2}a_t + \frac{1}{2}a_s, \quad (5)$$

were included in the fit due to correlation between a_s and a_t . The ERT parameters resulting from the fit were $\rho_t(0, 0) = 1.718 \pm 0.025$ fm and $\rho_s(0, 0) = 2.696 \pm 0.059$ fm. Also, the zero-energy shape-dependence parameter $\Delta r_t = -0.025 \pm 0.025$ fm. Hackenburg's [13] analysis also concluded that additional total cross section measurements for np scattering between 20 and 600 keV were required to use the parameters

of effective range theory to differentiate among NN potential models.

It was hoped that the present results in the 150–600 keV energy range would reduce the uncertainties in the parameters determined from the fit to the ERT expression [Eq. (4)] for the cross section. Following Hackenburg's method [13], we included our data in the fit. The resulting parameters were consistent with those determined by Hackenburg. The uncertainties were not significantly reduced, as our measurements were not precise enough to further constrain the parameters. According to Hackenburg [13], a 0.004% precision measurement at 130 keV is required to reduce the uncertainty in $\rho_t(0, 0)$ and Δr_t to 0.001 fm. By instead measuring the energy dependence of the cross section, we estimate that a precision of 0.5% across the 150 to 800 keV range currently measured is required to decrease these uncertainties, and 0.1% measurements across this range will decrease the uncertainty to 0.01 fm.

VI. CONCLUSION

Our measurement of the np total scattering cross section has filled in a large gap in the total cross section measurement below neutron energies of 500 keV. By measuring ratios of transmitted events with and without the samples in the beam, we were able to determine the cross section independently of the neutron detection efficiency. Both the np and nC total cross sections are consistent with previous measurements, and the nC results show significantly decreased scatter and uncertainty.

There is a slight systematic discrepancy between our measurements and the ENDF tabulations, with a -18 mb shift downward in the nC cross section, and a $+136$ mb shift upward in the np cross section. This discrepancy would not have been visible in the previous nC data. The previous np data in this range also show a slight increase relative to the theoretical curve.

However, when the present data are used to try to improve the fit of effective range theory, we find that our measurements are not precise enough to increase the precision on the resulting parameters. The effective range parameters ρ_d are most sensitive to measurements in the 20–600 keV region, but more precise data at higher energies have already constrained the parameters more narrowly than the precision of current measurements in this region. The discrepancy noted previously

is comparable to the current uncertainty and so does not significantly impact the determination of the ERT parameters. To be comparable to the current uncertainty in $\rho_t(0, 0)$ and Δr_t , 0.5% precision would be required across the energy range measured here, 150 and 800 keV. This precision is attainable with increased statistics and better characterization of the beam, both of which are possible with the current configuration.

ACKNOWLEDGMENTS

The authors would like to thank J. French for her work in the setup and running of the experiment. This work was supported by the United States Department of Energy, the National Science Foundation, and the SSAA.

-
- [1] J. Carlson and R. Schiavilla, *Rev. Mod. Phys.* **70**, 743 (1998).
 - [2] G. M. Hale and A. S. Johnson, in *Proc. 17th International IUPAP Conference on Few-Body Problems in Physics, 5–10 June 2003*, edited by W. Gloeckle and W. Tornow (Elsevier, Durham NC, 2004), pp. S120–S122.
 - [3] D. H. Frisch, *Phys. Rev.* **70**, 589 (1946).
 - [4] C. L. Bailey, W. E. Bennett, T. Bergstrahl, R. G. Nuckolls, H. T. Richards, and J. H. Williams, *Phys. Rev.* **70**, 583 (1946).
 - [5] E. Bretscher and E. B. Martin, *Helv. Phys. Acta* **23**, 15 (1950).
 - [6] J. Clement, P. Stoler, C. Goulding, and R. Fairchild, *Nucl. Phys. A* **183**, 51 (1972).
 - [7] H. Liskien and A. Paulsen, *At. Data Nucl. Data Tables* **15**, 57 (1975).
 - [8] C. M. Huddleston, R. O. Lane, L. L. Lee, and F. P. Mooring, *Phys. Rev.* **117**, 1055 (1960).
 - [9] R. M. Wilenzick, G. E. Mitchell, K. K. Seth, and H. W. Lewis, *Phys. Rev.* **121**, 1150 (1961).
 - [10] C. A. Uttley, Progress Reports: A.E.R.E. Harwell Reports No. 9, 1964.
 - [11] S. Pearlstein, in *Symposium on Nuclear Data Evaluation Methodology* (Brookhaven National Lab, Upton, NY, 1992).
 - [12] R. Sachs, *Nuclear Theory* (Addison-Wesley, Cambridge, 1953).
 - [13] R. W. Hackenburg, *Phys. Rev. C* **73**, 044002 (2006).
 - [14] E. Melkonian, *Phys. Rev.* **76**, 1744 (1949).
 - [15] W. Dilg, *Phys. Rev. C* **11**, 103 (1975).
 - [16] L. Koester and W. Nistler, *Phys. Rev. Lett.* **27**, 956 (1971).
 - [17] L. Koester and W. Nistler, *Z. Phys. A* **272**, 189 (1975).