

## MIT Open Access Articles

### *Advances in Bayesian Optimization with Applications in Aerospace Engineering*

The MIT Faculty has made this article openly available. **Please share** how this access benefits you. Your story matters.

**Citation:** Lam, Rémi, et al. "Advances in Bayesian Optimization with Applications in Aerospace Engineering." 2018 AIAA Non-Deterministic Approaches Conference, 8-12 January, 2018, Kissimmee, Florida, American Institute of Aeronautics and Astronautics, 2018.

**As Published:** <https://doi.org/10.2514/6.2018-1656>

**Publisher:** American Institute of Aeronautics and Astronautics

**Persistent URL:** <http://hdl.handle.net/1721.1/116471>

**Version:** Author's final manuscript: final author's manuscript post peer review, without publisher's formatting or copy editing

**Terms of use:** Creative Commons Attribution-Noncommercial-Share Alike



# Advances in Bayesian Optimization with Applications in Aerospace Engineering

Remi R. Lam\*

*MIT, Cambridge, MA, 02139, USA*

Matthias Poloczek†

*University of Arizona, Tucson, AZ, 85721, USA*

Peter I. Frazier‡

*Cornell University, Ithaca, NY, 14850, USA*

Karen E. Willcox§

*MIT, Cambridge, MA, 02139, USA*

Optimization requires the quantities of interest that define objective functions and constraints to be evaluated a large number of times. In aerospace engineering, these quantities of interest can be expensive to compute (e.g., numerically solving a set of partial differential equations), leading to a challenging optimization problem. Bayesian optimization (BO) is a class of algorithms for the global optimization of expensive-to-evaluate functions. BO leverages all past evaluations available to construct a surrogate model. This surrogate model is then used to select the next design to evaluate. This paper reviews two recent advances in BO that tackle the challenges of optimizing expensive functions and thus can enrich the optimization toolbox of the aerospace engineer. The first method addresses optimization problems subject to inequality constraints where a finite budget of evaluations is available, a common situation when dealing with expensive models (e.g., a limited time to conduct the optimization study or limited access to a supercomputer). This challenge is addressed via a lookahead BO algorithm that plans the sequence of designs to evaluate in order to maximize the improvement achieved, not only at the next iteration, but once the total budget is consumed. The second method demonstrates how sensitivity information, such as gradients computed with adjoint methods, can be incorporated into a BO algorithm. This algorithm exploits sensitivity information in two ways: first, to enhance the surrogate model, and second, to improve the selection of the next design to evaluate by accounting for future gradient evaluations. The benefits of the two methods are demonstrated on aerospace examples.

## I. Introduction

Design of aerospace engineering systems is challenging because it involves the evaluation of models that are typically expensive to evaluate and the objective function to optimize is often non-convex. In many cases, the systems of interest are governed by partial differential equations (PDEs), which result in expensive-to-evaluate simulation models. A significant further challenge arises when the system analysis must be treated as a black-box (i.e., the analysis mapping from input to output can be evaluated but intrusive manipulations of the code are not possible). In such a context, finding the global optimizer of a non-convex, expensive-to-evaluate function requires tailored algorithms. Bayesian optimization (BO) is a class of algorithm tackling such global optimization problems.

---

\*Graduate Student, Department of Aeronautics and Astronautics, rlam@mit.edu.

†Assistant Professor, Department of Systems and Industrial Engineering, poloczek@email.arizona.edu.

‡Professor, School of Operations Research and Information Engineering, pf98@cornell.edu.

§Professor, Department of Aeronautics and Astronautics, kwillcox@mit.edu, Associate Fellow AIAA.

BO has three main iterative steps: First, it builds a statistical model using data collected from the designs evaluated so far. Second, it defines a utility function based on that statistical model and solves a cheap auxiliary optimization problem that selects the next design to evaluate by maximizing this utility. Third, the new design evaluation is added to the data set, the statistical model is updated, and the process repeats. The statistical model is typically based on a Gaussian process (GP) regression model, leading to a cheap-to-evaluate utility function that balances the competing effects of exploration (evaluating designs in unexplored regions of the design space) and exploitation (evaluating designs in promising regions of the design space). One advantage of BO is that it is applicable to general black-box functions, since it only requires input-output analyses. A second advantage lies in its ability to carefully select the next design to evaluate, thus reducing the number of calls to the expensive-to-evaluate function. A third advantage lies in the flexibility to define the utility function, which could include extensions such as gradient information and budget information, topics both explored in this paper. BO has gained some popularity in the engineering design community, in particular through the efficient global optimization (EGO) algorithm.<sup>1</sup> We refer to Brochu et al. for an introduction to BO.<sup>2</sup>

In this paper, we review two algorithms that extend BO to several settings commonly encountered in engineering design. The first setting considers the problem of optimization subject to nonlinear, expensive-to-evaluate constraints when a finite budget of evaluations is prescribed. For such a setting, Lam and Willcox<sup>3</sup> proposed a **rollout** BO algorithm using a dynamic programming approach to select the next design to evaluate in order to maximize the long-term feasible improvement. It builds on the unconstrained version of the **rollout** algorithm.<sup>4</sup> The second setting incorporates sensitivity information such as gradients to BO. In such a case, Poloczek, Wilson and Frazier<sup>5</sup> proposed to use the derivative-enabled knowledge gradient (dKG) algorithm to both augment the statistical model with the derivative information and improve the selection of the next design to evaluate. The benefits of the two algorithms are demonstrated on aerospace problems.

The remainder of this paper is organized as follows. Sec. II gives a brief overview of BO. Sec. III presents the **rollout** algorithm developed for the optimization of expensive function subject to nonlinear constraints with a finite budget of evaluations. Sec. IV extends BO to use gradient information with the dKG algorithm. Finally, we summarize our findings in Sec. V.

## II. Bayesian Optimization

In this section, we present the vanilla BO algorithm employed for unconstrained optimization. The standard BO approach considers the following optimization problem:

$$\mathbf{x}^* = \underset{\mathbf{x} \in \mathcal{X}}{\operatorname{argmin}} f(\mathbf{x}) \quad (1)$$

where  $f$  is an expensive-to-evaluate objective function taking as input a  $d$ -dimensional design vector  $\mathbf{x}$  from a box-constrained design space  $\mathcal{X} \subset \mathbb{R}^d$  and returning a scalar value. Our goal is to compute a minimizer  $\mathbf{x}^*$  of  $f$ . Note that although we write Eq. 1 as an equality, the optimizer  $\mathbf{x}^*$  may not be unique.

To solve this problem, BO starts with an initial training set  $\mathcal{D}_1 = \{(\mathbf{x}_1, f(\mathbf{x}_1))\}$  containing a design  $\mathbf{x}_1$  and its associated objective function value  $f(\mathbf{x}_1)$ . At each iteration  $n$ , the training set  $\mathcal{D}_n$  is used to construct a statistical model. This statistical model is typically a GP, also known as Kriging.<sup>6,7,8</sup> For any given design of interest  $\mathbf{x}$ , the posterior mean  $\bar{\mu}(\mathbf{x}; \mathcal{D}_n, f)$  of the GP associated with  $f$  at  $\mathbf{x}$  conditioned on  $\mathcal{D}_n$  can cheaply be evaluated and serves as a surrogate for the objective function  $f$ . Similarly, the posterior variance  $\bar{\sigma}^2(\mathbf{x}; \mathcal{D}_n, f)$  is a cheap-to-evaluate measure of the uncertainty of the objective function surrogate at  $\mathbf{x}$ . We refer to Rasmussen and Williams<sup>9</sup> for a review of GPs, including the closed-form expressions of the posterior mean and variance. Based on this statistical model, a utility function  $U_n(\mathbf{x}; \mathcal{D}_n)$  quantifies the benefits of evaluating a new design  $\mathbf{x}$  according to the surrogate model built with  $\mathcal{D}_n$ . The next design to evaluate  $\mathbf{x}_{n+1}$  is selected by solving an auxiliary optimization problem that maximizes the utility function. Popular utility functions include the expected improvement<sup>1</sup> (EI), the probability of improvement<sup>10</sup> (PI) and the upper confidence bound<sup>11</sup> (UCB). Once evaluated with  $f$ , the training set is augmented with the new training point  $(\mathbf{x}_{n+1}, f(\mathbf{x}_{n+1}))$ . This process iterates until a stopping criteria is met (e.g., when the maximum number of allowed evaluations  $N$  is reached). The BO algorithm is summarized in Alg. 1.

---

**Algorithm 1** Bayesian Optimization

---

**Input:** Initial training set  $\mathcal{D}_1$ , budget  $N$ , utility function  $U_n$   
**for**  $n = 1$  **to**  $N$  **do**  
    Construct GP using  $\mathcal{D}_n$   
    Solve auxiliary optimization problem for  $\mathbf{x}_{n+1} = \operatorname{argmax}_{\mathbf{x} \in \mathcal{X}} U_n(\mathbf{x}; \mathcal{D}_n)$   
    Evaluate  $f(\mathbf{x}_{n+1})$   
    Augment training set  $\mathcal{D}_{n+1} = \mathcal{D}_n \cup \{(\mathbf{x}_{n+1}, f(\mathbf{x}_{n+1}))\}$   
**end for**

---

BO has been shown to be effective at solving black-box optimization problems in engineering design.<sup>8, 12, 13, 14, 15</sup> Extensions to constrained optimization problems exist and have been shown to be effective for low-dimensional relatively simple optimization problems including the engineering design of a piston<sup>16</sup> and the optimization of a hybrid electric vehicle.<sup>17</sup> However, these constrained BO approaches can require many function evaluations to find good designs, especially when the feasible design space is highly constrained. One limitation is the greedy nature of the BO iteration, which only looks at the immediate reward when choosing the next design to evaluate. This is particularly short-sighted when the design exploration needs to balance objective function decrease with feasibility. A second limitation is the ability to exploit other information, such as gradients. In the following sections we discuss extensions to BO that address these two limitations.

### III. Lookahead Bayesian Optimization with Inequality Constraints

In this section, we consider the problem of optimizing an objective function subject to nonlinear constraints when a finite budget of evaluations is prescribed. We present a lookahead BO algorithm, `rollout`, that selects the next design to evaluate in order to maximize the expected long-term feasible decrease of the objective function.

#### A. Problem Formulation

We consider the following constrained optimization problem:

$$\begin{aligned} \mathbf{x}^* &= \operatorname{argmin}_{\mathbf{x} \in \mathcal{X}} f(\mathbf{x}) \\ \text{s.t. } & g_i(\mathbf{x}) \leq 0, \forall i \in \{1, \dots, m\}, \end{aligned} \tag{2}$$

where  $\mathbf{x}$  is a  $d$ -dimensional design vector. The objective function  $f$  and the  $m$  constraint functions  $g_1, \dots, g_m$  take a design from a boxed-constrained design space  $\mathcal{X} \subset \mathbb{R}^d$  as input and return a scalar. Our goal is to compute a minimizer  $\mathbf{x}^*$  of  $f$  satisfying the constraints using a maximum of  $N$  iterations (i.e., a finite evaluation budget).

#### B. Constrained Bayesian Optimization

Constrained Bayesian optimization (CBO) extends BO algorithms to handle nonlinear constraints. To do so, CBO models the objective function and the constraints with a statistical model. One popular choice is to model each expensive-to-evaluate function with a GP. Similarly to BO, this statistical model is used to define a utility function that quantifies the value of evaluating a design under consideration. At each iteration  $n$ , CBO selects the design  $\mathbf{x}_{n+1}$  maximizing this utility function and evaluates  $f(\mathbf{x}_{n+1})$  and  $g_i(\mathbf{x}_{n+1})$  for all  $i \in \{1, \dots, m\}$ . Using these new observations, the statistical model is updated for the next iteration.

Many utility functions have been proposed for CBO.<sup>18, 19, 20, 21, 22</sup> This includes utilities based on feasible improvement,<sup>16, 23, 24</sup> penalty method,<sup>25</sup> Lagrangian formulation,<sup>26</sup> or information gain.<sup>27, 28, 29</sup> For instance, the expected improvement with constraint (EIC)<sup>16</sup> is a natural extension of the expected improvement (EI) utility. It is defined to only reward designs that are feasible. In the case where the GPs representing the expensive-to-evaluate functions are independent, EIC can be computed in closed-form. For a given design of interest  $\mathbf{x}_{n+1}$  and a given training set  $\mathcal{D}_n$ , EIC is given by:

$$EI_c(\mathbf{x}_{n+1}; \mathcal{D}_n) = EI(\mathbf{x}_{n+1}; \mathcal{D}_n) \prod_{i=1}^m PF(\mathbf{x}_{n+1}; \mathcal{D}_n, g_i), \tag{3}$$

with  $EI$  the expected improvement and  $PF$  the probability of feasibility:

$$EI(\mathbf{x}; \mathcal{D}) = (f_{best}^{\mathcal{D}} - \bar{\mu}(\mathbf{x}; \mathcal{D}, f)) \Phi \left( \frac{f_{best}^{\mathcal{D}} - \bar{\mu}(\mathbf{x}; \mathcal{D}, f)}{\bar{\sigma}(\mathbf{x}; \mathcal{D}, f)} \right) + \bar{\sigma}(\mathbf{x}; \mathcal{D}, f) \phi \left( \frac{f_{best}^{\mathcal{D}} - \bar{\mu}(\mathbf{x}; \mathcal{D}, f)}{\bar{\sigma}(\mathbf{x}; \mathcal{D}, f)} \right), \quad (4)$$

$$PF(\mathbf{x}; \mathcal{D}, g_i) = \Phi \left( -\frac{\bar{\mu}(\mathbf{x}; \mathcal{D}, g_i)}{\bar{\sigma}(\mathbf{x}; \mathcal{D}, g_i)} \right), \quad (5)$$

where  $f_{best}^{\mathcal{D}}$  is the best feasible value of the objective function in the training set  $\mathcal{D}$ ,  $\Phi$  (respectively  $\phi$ ) is the CDF (respectively PDF) of the standard Gaussian distribution. We recall that  $\bar{\mu}(\mathbf{x}; \mathcal{D}, \varphi)$  and  $\bar{\sigma}(\mathbf{x}; \mathcal{D}, \varphi)$  are the posterior mean and standard deviation of the GP associated with  $\varphi \in \{f, g_1, \dots, g_m\}$  conditioned on the data  $\mathcal{D}$ , at the design  $\mathbf{x}$ .

EIC quantifies the expected feasible improvement obtained over one step. This is a greedy approach that does not take into account the long-term effect of an evaluation. In particular, a greedy approach cannot plan several steps ahead. However, planning is an ability necessary to balance the BO exploration-exploitation trade-off in a principled way. In the next subsection, we present a lookahead approach capable of such planning over several steps.

### C. Lookahead Constrained Bayesian Optimization: the rollout Algorithm

We now present `rollout`, the lookahead CBO algorithm introduced in Lam and Willcox.<sup>3</sup>

Given a fixed budget of evaluations, the performance of an optimizer is quantified by the improvement obtained at the end of the optimization, i.e., when the evaluation budget is consumed. Thus, at each iteration  $n$ , the best CBO algorithm evaluates the design leading, at the end of the optimization, to the maximum expected feasible improvement.

To define this optimal CBO algorithm, it is first necessary to characterize how a design evaluated at iteration  $n$  is likely to affect the following iterations under an optimization policy. An optimization policy is a mapping from a training set  $\mathcal{D}$  to a design to evaluate  $\mathbf{x}$ . Using GPs as generative models, it is possible to simulate the possible values of the expensive functions at a given design. Combined with an optimization policy, this defines a mechanism that simulates the possible future steps of the optimization.<sup>4</sup> Each possible scenario has a known probability of occurrence characterized by the statistical model. Thus, for a given optimization policy, the expected improvement obtained at the end of the optimization can be quantified with this simulation machinery. The optimal CBO algorithm corresponds to the (unknown) best optimization policy which is the solution of an intractable dynamic programming (DP) problem.

The `rollout` algorithm is an approximate DP algorithm that circumvents the nested maximizations responsible for the intractability of the DP formulation. At each iteration, `rollout` evaluates the design that maximizes the long-term expected feasible improvement where the future steps are guided by a (known) user-defined optimization policy. To further simplify the algorithm, a rolling horizon  $h$  limits the number of steps simulated, and expectations are numerically approximated using  $N_q$  Gauss-Hermite quadrature points. The resulting algorithm is described in Alg. 2, and the computation of the utility function is described in Alg. 3.

---

#### Algorithm 2 Constrained Bayesian Optimization with `rollout`

---

**Input:** Initial training set  $\mathcal{D}_1$ , budget  $N$ , rolling horizon  $h$ , discount  $\gamma$ , number of quadrature points  $N_q$   
**for**  $n = 1$  **to**  $N$  **do**  
    Construct  $m + 1$  independent GPs using  $\mathcal{D}_n$   
    Compute rolling horizon  $h' = \min\{h, N - n\}$   
    Solve auxiliary optimization problem for  $\mathbf{x}_{n+1} = \underset{\mathbf{x} \in \mathcal{X}}{\operatorname{argmax}} \operatorname{utility}(\mathbf{x}, h', \mathcal{D}_n, \gamma, N_q)$   
    Evaluate  $f(\mathbf{x}_{n+1}), g_1(\mathbf{x}_{n+1}), \dots, g_m(\mathbf{x}_{n+1})$   
    Augment training set  $\mathcal{D}_{n+1} = \mathcal{D}_n \cup \{(\mathbf{x}_{n+1}, f(\mathbf{x}_{n+1}), g_1(\mathbf{x}_{n+1}), \dots, g_m(\mathbf{x}_{n+1}))\}$   
**end for**

---

### D. Numerical Results for the rollout algorithm

We now illustrate the CBO `rollout` algorithm on an aerospace engineering problem.

---

**Algorithm 3** Rollout Utility Function
 

---

**Function:**  $\text{utility}(\mathbf{x}, h, \mathcal{D}, \gamma, N_q)$ 

 Construct one GP per expensive-to-evaluate function using  $\mathcal{D}$ 
 $U \leftarrow EI_c(\mathbf{x}; \mathcal{D})$ 
**if**  $h > 0$  **then**

 Compute  $\bar{\mu}(\mathbf{x}; \mathcal{D}, \varphi)$  and  $\bar{\sigma}^2(\mathbf{x}; \mathcal{D}, \varphi)$  for  $\varphi \in \{f, g_1, \dots, g_m\}$ 

 Generate  $N_q$  Gauss-Hermite quadrature weights  $\alpha^{(q)}$  and points  $\mathbf{w}^{(q)} \in \mathbb{R}^{m+1}$  associated with the  $(m+1)$ -dimensional Gaussian distribution with mean  $[\bar{\mu}(\mathbf{x}; \mathcal{D}, f), \bar{\mu}(\mathbf{x}; \mathcal{D}, g_1), \dots, \bar{\mu}(\mathbf{x}; \mathcal{D}, g_m)]^T$  and covariance  $\text{Diag}(\bar{\sigma}(\mathbf{x}; \mathcal{D}, f), \bar{\sigma}(\mathbf{x}; \mathcal{D}, g_1), \dots, \bar{\sigma}(\mathbf{x}; \mathcal{D}, g_m))$ 
**for**  $q = 1$  **to**  $N_q$  **do**
 $\mathcal{D}' \leftarrow \mathcal{D} \cup \{(\mathbf{x}, \mathbf{w}^{(q)})\}$ 
**if**  $h > 1$  **then**
 $\mathbf{x}' \leftarrow \underset{\mathbf{x} \in \mathcal{X}}{\text{argmax}} EI_c(\mathbf{x}; \mathcal{D}')$  (user-defined policy)

**else**
 $\mathbf{x}' \leftarrow \underset{\mathbf{x} \in \mathcal{X}}{\text{argmin}} \bar{\mu}(\mathbf{x}; \mathcal{D}', f)$  s.t.  $PF(\mathbf{x}; \mathcal{D}') \geq 0.975$  (user-defined policy)

**end if**
 $U \leftarrow U + \gamma \alpha^{(q)} \text{utility}(\mathbf{x}', h-1, \mathcal{D}')$ 
**end for**
**end if**
**Output:**  $U$ 


---

We consider a reacting flow governed by a set of PDEs using the model in Ref. 30. We seek the maximization of the heat released by the chemical reaction while maintaining the maximum temperature below a user-defined threshold to avoid melting parts of the system. The design variables are the equivalence ratio  $\phi \in [0, 2]$ , the inlet velocity  $u \in [40, 80]$  cm/sec and the inlet temperature  $T_i \in [200, 400]$  K. The temperature threshold is set to  $T_{max} = 1800$  K. We consider a finite budget of  $N = 40$  iterations to conduct the optimization. At each iteration the value of the objective function (heat released) and the constraint (maximum temperature in the domain) are computed from the solution of a system of PDEs.

We note that lookahead approaches, such as `rollout`, produce different sequences of decisions for different budget  $N$ , while greedy algorithms, such as EIC, always produce the same sequence of decisions independent of  $N$ . Therefore, in the context of finite budget optimization, the performance of the optimization should only be evaluated at the end of iteration  $N$ . However, to illustrate the behavior of the `rollout` algorithm, we show the full convergence history in Fig. 1.

Fig. 1 shows the utility gap  $e_n$  as a function of the iteration  $n$ . The utility gap measures the difference between the optimal feasible value of the objective function  $f^*$  and the value of the objective function  $f(\mathbf{x}_n^*)$  at a recommended design  $\mathbf{x}_n^*$  at iteration  $n$ :

$$e_n = \begin{cases} |f(\mathbf{x}_n^*) - f^*| & \text{if } \mathbf{x}_n^* \text{ is feasible,} \\ |\Psi - f^*| & \text{else,} \end{cases} \quad (6)$$

where  $\Psi$  is a penalty for recommending an infeasible design. We note that the recommendation is computed in a post-processing step to measure the performance and does not influence the optimization. We use the following recommendation:<sup>29</sup>

$$\mathbf{x}_n^* = \underset{\mathbf{x} \in \mathcal{X}}{\text{argmin}} \bar{\mu}_n(\mathbf{x}; \mathcal{D}_n, f) \quad \text{s.t.} \quad \prod_{i=1}^m PF(\mathbf{x}_{n+1}; \mathcal{D}_n, g_i) \geq 0.975. \quad (7)$$

Fig. 1 shows that the lookahead algorithm `rollout` with  $h = 1$  and  $h = 2$  outperforms the greedy EIC after 20 iterations. In this example, at the end of the budget, the `rollout` outperforms the greedy EIC by one order of magnitude.

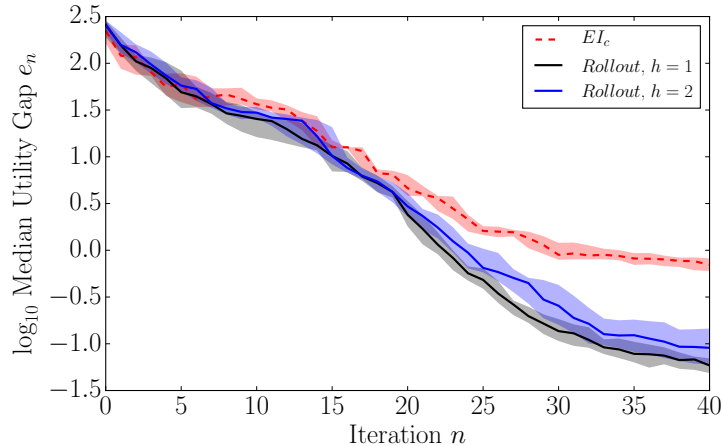


Figure 1: Median utility gap for EIC and the `rollout` algorithm with rolling horizons  $h = 1$  and  $h = 2$ . `rollout` outperforms the greedy EIC after  $n = 20$  iterations. Medians are computed with 50 independent runs and the shadings show the 95% confidence interval of the median statistics.

#### IV. Bayesian Optimization with Derivative Information

In this section, we return to the original unconstrained problem of minimizing an expensive-to-evaluate function described by Eq. 1. We consider the situation where gradients of the objective function are available and present `dKG`,<sup>5</sup> an algorithm that leverages this additional information to improve both the statistical model and the selection of the next design to evaluate.

Typically in BO, it is assumed that the objective function  $f$  is a black-box function. That is, upon evaluating  $f$  at some design  $\mathbf{x}$ , we obtain only the function value  $f(\mathbf{x})$  (possibly with noise) but no derivative information. However, derivative information is often available at little cost, e.g., when using an adjoint method to optimize a system modeled by a system of PDEs.<sup>31,32,33,34,35,36,37,38</sup> This has motivated investigations how such information can be incorporated into BO algorithms to extend their applicability to problems of higher dimension. Gradients have already been exploited to improve GPs.<sup>39,40</sup> In particular gradient-enhanced Kriging (GEK)<sup>41,14,42,43</sup> has been developed in the context of optimization.<sup>44,45</sup> Previous works focused on the expected improvement utility function.<sup>10,46,47,48</sup> In the following, we present an extension of the Knowledge Gradient (KG) utility function<sup>49</sup> that incorporates sensitivity information. This utility function is aware that the gradient of the objective function will be evaluated at the next iteration and takes it into account to select the next design to evaluate. Additionally, it allows for the selection of multiple designs to evaluate in batch at each iteration, an advantage when the model can be queried in parallel.

##### A. The `dKG` Algorithm

Wu, Poloczek, Wilson, and Frazier<sup>5</sup> proposed the *derivative-enabled knowledge gradient* (`dKG`) algorithm. Consider the case where a single design  $\mathbf{z}_1$  is selected for evaluation at each iteration  $n$ . Note that we use the notation  $\mathbf{z}$  here to denote a design selected for evaluation, in contrast to  $\mathbf{x}$  to denote a generic design. In this case, the `dKG` utility function quantifies the difference between the current minimum value of the posterior mean of the objective function,  $\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_n, f)$ , and the future minimum value of the posterior mean of the objective function,  $\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_{n+1}, f)$ , once the additional values of  $f$  and  $\nabla f$  at  $\mathbf{z}_1$  are added in the training set  $\mathcal{D}_{n+1}$ . Because  $f(\mathbf{z}_1)$  and  $\nabla f(\mathbf{z}_1)$  are unknown at iteration  $n$ , they are modeled by the random variables  $f_1$  and  $\nabla f_1$  based on the current GP. The `dKG` utility function quantifies the change in posterior mean minimum value in an expected sense:

$$\text{dKG}(\mathbf{z}_1; \mathcal{D}_n) = \min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_n, f) - \mathbb{E}[\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_{n+1}, f)],$$

where the expectation is taken with respect to the random variables  $f_1$  and  $\nabla f_1$  and  $\mathcal{D}_{n+1} = \mathcal{D}_n \cup \{(\mathbf{z}_1, f_1, \nabla f_1)\}$ .

Now consider the batch case. Suppose that we have selected  $q$  designs for the next batch:  $\mathbf{z}_1, \dots, \mathbf{z}_q$ . We wonder how the observation of the function values and gradients at  $\mathbf{z}_1, \dots, \mathbf{z}_q$  will change our posterior belief and in particular the optimum  $\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_{n+1}, f)$ . While we cannot know the exact optimal posterior mean before observing these  $q \cdot (d + 1)$  values, we can compute its expectation based on our posterior belief how the observations of the function values and gradients are distributed. The best design (after observing the function values and gradients of this batch) has an expected value of  $\mathbb{E}[\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_{n+1}, f)]$  under the current posterior, i.e., before we obtain the observations at  $\mathbf{z}_1, \dots, \mathbf{z}_q$ . The dKG utility function in the batch case then becomes

$$\text{dKG}(\mathbf{z}_1, \dots, \mathbf{z}_q; \mathcal{D}_n) = \min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_n, f) - \mathbb{E}[\min_{\mathbf{x} \in \mathcal{X}} \bar{\mu}(\mathbf{x}; \mathcal{D}_{n+1}, f)],$$

where the expectation is now taken with respect to random variables  $f_1, \dots, f_q$  (respectively  $\nabla f_1, \dots, \nabla f_q$ ) modeling  $f(\mathbf{z}_1), \dots, f(\mathbf{z}_q)$  (respectively  $\nabla f(\mathbf{z}_1), \dots, \nabla f(\mathbf{z}_q)$ ) and  $\mathcal{D}_{n+1}$  is the future training set defined by  $\mathcal{D}_{n+1} = \mathcal{D}_n \cup \{(\mathbf{z}_1, f_1, \nabla f_1), \dots, (\mathbf{z}_q, f_q, \nabla f_q)\}$ .

We refer to Wu et al. for details on how to find  $\arg \max$  dKG in practice. The dKG algorithm is summarized in Alg. 4.

---

**Algorithm 4** Batch Gradient-enhanced Bayesian Optimization with dKG

---

**Input:** Initial training set  $\mathcal{D}_1$ , maximum iteration  $N$ , batch size  $q$   
**for**  $n = 1$  **to**  $N$  **do**  
    Construct GP using  $\mathcal{D}_n$   
    Solve auxiliary optimization problem for  $(\mathbf{z}_1, \dots, \mathbf{z}_q) = \arg \max_{(\mathbf{z}_1, \dots, \mathbf{z}_q) \in \mathcal{X}^q} \text{dKG}(\mathbf{z}_1, \dots, \mathbf{z}_q; \mathcal{D}_n)$   
    Evaluate  $f(\mathbf{z}_1), \dots, f(\mathbf{z}_q)$  and  $\nabla f(\mathbf{z}_1), \dots, \nabla f(\mathbf{z}_q)$   
    Augment training set  $\mathcal{D}_{n+1} = \mathcal{D}_n \cup \{(\mathbf{z}_1, f(\mathbf{z}_1), \nabla f(\mathbf{z}_1)), \dots, (\mathbf{z}_q, f(\mathbf{z}_q), \nabla f(\mathbf{z}_q))\}$   
**end for**

---

Interestingly, Wu et al. demonstrated that their utility function is better suited to leverage derivative information than expected improvement that was used in previous works. The underlying reason is that the knowledge gradient anticipates the observation of the gradient and captures its effect on the posterior distribution in the utility function.

While incorporating derivative information into the GP results in a more accurate posterior distribution, the computational cost of obtaining this posterior is increased from  $O(n^3 q^3)$  to  $O(n^3 q^3 d^3)$  in each iteration  $n$ , where we recall that  $d$  is the dimension of the design variables and  $q$  is the batch size. Wu et al. addressed this problem by focusing on relevant directional derivatives (see Algorithm 1 in their paper). Moreover, they showed that the dKG algorithm leverages noisy observations of gradients and can be used even if derivative information is available only for some of the optimization parameters.

## B. Numerical Results for the dKG algorithm

We evaluate the dKG algorithm on the eight-dimensional aerostructural optimization problem defined in the OpenMDAO test suite and available at <https://github.com/mdolab/OpenAeroStruct>. This model couples a vortex-lattice method and a three-dimensional beam model to simulate aerostructural analysis of a wing.

We compare the performance of dKG to the default gradient-based optimization algorithm SLSQP provided by the OpenMDAO framework. dKG outperforms SLSQP and additionally has the advantage that it provides good solutions already at low computational cost. Note that dKG chooses eight designs in batch in each iteration and evaluates these designs simultaneously. In this benchmarks, all partial derivatives are available, thus dKG observes 72 ( $= q(d + 1)$ ) values at each iteration. Fig. 2 shows the performances of dKG and the gradient-based optimizer SLSQP.



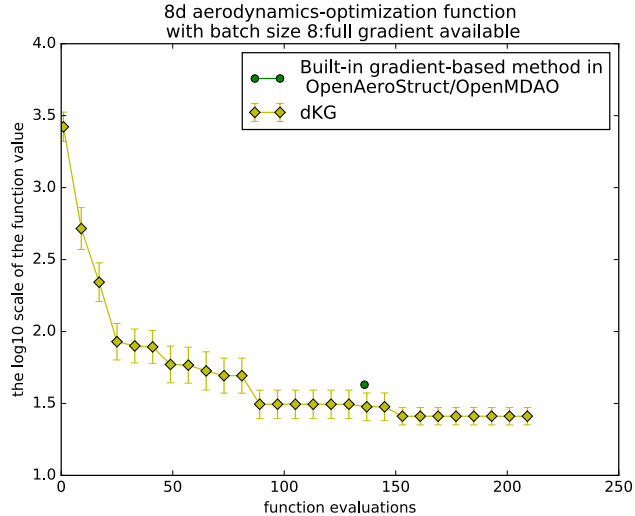


Figure 2: Combining Bayesian and gradient-based optimization, dKG outperforms the gradient-based optimization algorithm of OpenMDAO on an aerosturctural test problem. dKG selects batches of eight points to be evaluated in parallel.

The source code of the dKG algorithm is available at <https://github.com/wujian16/Cornell-MOE>.

## V. Conclusions

In this paper, we reviewed two BO algorithms adapted for the optimization of expensive-to-evaluate aerospace engineering systems. BO sequentially updates a statistical model that is used to select the next design to evaluate, reducing the number of calls to the expensive function. Each algorithm presented addresses a particular challenge encountered in aerospace engineering.

The first algorithm, rollout, selects the next design to evaluate in order to maximize the expected feasible improvement obtained over several steps. It allows for the optimization of systems subject to nonlinear expensive-to-evaluate inequality constraints, a common situation in aerospace engineering. Accounting for the long-term effect of a decision was shown to improve the optimization performance. Such benefits were demonstrated on a reacting flow problem.

The second algorithm, dKG, leverages sensitivity information, such as gradients computed via adjoint methods, to improve the statistical model and select a batch of designs to evaluate at each iteration. This was shown to outperform a gradient-based optimization algorithm on an aerosturctural optimization problem.

The two BO algorithms reviewed in this paper have been demonstrated to improve performance on several aerospace design problems. They are promising tools for the aerospace engineer and have the potential to further enable the global optimization of expensive-to-evaluate functions.

## Acknowledgment

The methods described in this paper were developed for the Multi-fidelity, Multi-information source, Multi-physics (M<sup>3</sup>) project as part of the U.S. Air Force Office of Scientific Research (AFOSR) Multidisciplinary Research Program of the University Research Initiative (MURI). The authors gratefully acknowledge the support of AFOSR Award Number FA9550-15-1-0038, program manager Dr. Jean-Luc Cambier.

## References

- <sup>1</sup>Jones, D. R., Schonlau, M., and Welch, W. J., "Efficient Global Optimization of Expensive Black-box Functions," *Journal of Global Optimization*, Vol. 13, No. 4, 1998, pp. 455–492.
- <sup>2</sup>Brochu, E., Cora, V. M., and De Freitas, N., "A Tutorial on Bayesian Optimization of Expensive Cost Functions, with Application to Active User Modeling and Hierarchical Reinforcement Learning," *arXiv preprint arXiv:1012.2599*, 2010.

- <sup>3</sup>Lam, R. R. and Willcox, K. E., “Lookahead Bayesian Optimization with Inequality Constraints,” *Advances in Neural Information Processing Systems* 30, 2017, pp. 1888–1898.
- <sup>4</sup>Lam, R. R., Willcox, K. E., and Wolpert, D. H., “Bayesian Optimization with a Finite Budget: An Approximate Dynamic Programming Approach,” *Advances in Neural Information Processing Systems*, 2016, pp. 883–891.
- <sup>5</sup>Wu, J., Poloczek, M., Wilson, A., and Frazier, P., “Bayesian Optimization with Gradients,” *Advances in Neural Information Processing Systems*, 2017, Accepted for publication.
- <sup>6</sup>Krige, D. G., “A Statistical Approach to Some Basic Mine Valuation Problems on the Witwatersrand,” *Journal of the Southern African Institute of Mining and Metallurgy*, Vol. 52, No. 6, 1951, pp. 119–139.
- <sup>7</sup>Matheron, G., “The Theory of Regionalized Variables and its Applications.” *Les Cahiers de Morphologie Mathématique (Fontainebleau)*. Fasc. 5. 218 p., 1971.
- <sup>8</sup>Simpson, T. W., Mauery, T. M., Korte, J. J., and Mistree, F., “Kriging Models for Global Approximation in Simulation-based Multidisciplinary Design Optimization,” *AIAA Journal*, Vol. 39, No. 12, 2001, pp. 2233–2241.
- <sup>9</sup>Rasmussen, C. E. and Williams, C. K. I., *Gaussian Processes for Machine Learning*, MIT Press, Cambridge, MA, 2006.
- <sup>10</sup>Lizotte, D. J., *Practical Bayesian Optimization*, Ph.D. thesis, University of Alberta, 2008.
- <sup>11</sup>Srinivas, N., Krause, A., Kakade, S. M., and Seeger, M., “Gaussian Process Optimization in the Bandit Setting: No Regret and Experimental Design,” *Proceedings of the 27th International Conference on Machine Learning*, 2010, pp. 1015–1022.
- <sup>12</sup>Queipo, N. V., Haftka, R. T., Shyy, W., Goel, T., Vaidyanathan, R., and Tucker, P. K., “Surrogate-based Analysis and Optimization,” *Progress in Aerospace Sciences*, Vol. 41, No. 1, 2005, pp. 1–28.
- <sup>13</sup>Wang, G. G. and Shan, S., “Review of Metamodeling Techniques in Support of Engineering Design Optimization,” *Journal of Mechanical Design*, Vol. 129, No. 4, 2007, pp. 370–380.
- <sup>14</sup>Forrester, A. I. J. and Keane, A. J., “Recent Advances in Surrogate-based Optimization,” *Progress in Aerospace Sciences*, Vol. 45, No. 1, 2009, pp. 50–79.
- <sup>15</sup>Viana, F. A. C., Simpson, T. W., Balabanov, V., and Toropov, V., “Metamodeling in Multidisciplinary Design Optimization: How Far Have We Really Come?” *AIAA Journal*, Vol. 52, No. 4, 2014.
- <sup>16</sup>Schonlau, M., Welch, W. J., and Jones, D. R., “Global Versus Local Search in Constrained Optimization of Computer Models,” *Lecture Notes-Monograph Series*, 1998, pp. 11–25.
- <sup>17</sup>Sasena, M. J., Papalambros, P., and Goovaerts, P., “Exploration of Metamodeling Sampling Criteria for Constrained Global Optimization,” *Engineering Optimization*, Vol. 34, No. 3, 2002, pp. 263–278.
- <sup>18</sup>Picheny, V., Gramacy, R. B., Wild, S., and Le Digabel, S., “Bayesian Optimization Under Mixed Constraints with a Slack-variable Augmented Lagrangian,” *Advances in Neural Information Processing Systems*, 2016, pp. 1435–1443.
- <sup>19</sup>Audet, C., Denni, J., Moore, D., Booker, A., and Frank, P., “A Surrogate-model-based Method for Constrained Optimization,” *8th Symposium on Multidisciplinary Analysis and Optimization*, 2000.
- <sup>20</sup>Sasena, M. J., Papalambros, P. Y., and Goovaerts, P., “The Use of Surrogate Modeling Algorithms to Exploit Disparities in Function Computation Time within Simulation-based Optimization,” *Constraints*, Vol. 2, 2001, pp. 5.
- <sup>21</sup>Gramacy, R. B. and Lee, H. K. H., “Optimization Under Unknown Constraints,” *arXiv preprint arXiv:1004.4027*, 2010.
- <sup>22</sup>Picheny, V., “A Stepwise Uncertainty Reduction Approach to Constrained Global Optimization.” *AISTATS*, 2014, pp. 787–795.
- <sup>23</sup>Gardner, J., Kusner, M., Weinberger, K. Q., Cunningham, J., and Xu, Z., “Bayesian Optimization with Inequality Constraints,” *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, JMLR Workshop and Conference Proceedings, 2014, pp. 937–945.
- <sup>24</sup>Feliot, P., Bect, J., and Vazquez, E., “A Bayesian Approach to Constrained Single-and Multi-objective Optimization,” *Journal of Global Optimization*, Vol. 67, No. 1-2, 2017, pp. 97–133.
- <sup>25</sup>Björkman, M. and Holmström, K., “Global Optimization of Costly Nonconvex Functions Using Radial Basis Functions,” *Optimization and Engineering*, Vol. 4, No. 1, 2000, pp. 373–397.
- <sup>26</sup>Gramacy, R. B., Gray, G. A., Le Digabel, S., Lee, H. K. H., Ranjan, P., Wells, G., and Wild, S. M., “Modeling an Augmented Lagrangian for Blackbox Constrained Optimization,” *Technometrics*, Vol. 58, No. 1, 2016, pp. 1–11.
- <sup>27</sup>Gelbart, M. A., Snoek, J., and Adams, R. P., “Bayesian Optimization with Unknown Constraints,” *arXiv preprint arXiv:1403.5607*, 2014.
- <sup>28</sup>Hernández-Lobato, J. M., Gelbart, M. A., Adams, R. P., Hoffman, M. W., and Ghahramani, Z., “A General Framework for Constrained Bayesian Optimization using Information-based Search,” *arXiv preprint arXiv:1511.09422*, 2015.
- <sup>29</sup>Hernández-Lobato, J. M., Gelbart, M. A., Hoffman, M. W., Adams, R. P., and Ghahramani, Z., “Predictive Entropy Search for Bayesian Optimization with Unknown Constraints,” *Proceedings of the 32nd International Conference on Machine Learning, Lille, France*, 2015.
- <sup>30</sup>Buffoni, M. and Willcox, K. E., “Projection-based Model Reduction for Reacting Flows,” *40th Fluid Dynamics Conference and Exhibit*, 2010, p. 5008.
- <sup>31</sup>Lions, J. L., *Optimal Control of Systems Governed by Partial Differential Equations*, Vol. 170, Springer Verlag, 1971.
- <sup>32</sup>Jameson, A., “Aerodynamic Design via Control Theory,” *Journal of Scientific Computing*, Vol. 3, No. 3, 1988, pp. 233–260.
- <sup>33</sup>Reuther, J. J., Jameson, A., Alonso, J. J., Rimlinger, M. J., and Saunders, D., “Constrained Multipoint Aerodynamic Shape Optimization using an Adjoint Formulation and Parallel Computers, Part 2,” *Journal of Aircraft*, Vol. 36, No. 1, 1999, pp. 61–74.
- <sup>34</sup>Giles, M. B. and Pierce, N. A., “An Introduction to the Adjoint Approach to Design,” *Flow, Turbulence and Combustion*, Vol. 65, No. 3-4, 2000, pp. 393–415.
- <sup>35</sup>Giles, M. B. and Süli, E., “Adjoint Methods for PDEs: A Posteriori Error Analysis and Postprocessing by Duality,” *Acta Numerica*, Vol. 11, 2002, pp. 145–236.
- <sup>36</sup>Martins, J. R. R. A., Alonso, J. J., and Reuther, J. J., “A Coupled-adjoint Sensitivity Analysis Method for High-fidelity Aero-structural Design,” *Optimization and Engineering*, Vol. 6, No. 1, 2005, pp. 33–62.

- <sup>37</sup>Biros, G. and Ghattas, O., “Parallel Lagrange–Newton–Krylov–Schur Methods for PDE-Constrained Optimization. Part I: The Krylov–Schur Solver,” *SIAM Journal on Scientific Computing*, Vol. 27, No. 2, 2005, pp. 687–713.
- <sup>38</sup>Plessix, R.-É., “A Review of the Adjoint-state Method for Computing the Gradient of a Functional with Geophysical Applications,” *Geophysical Journal International*, Vol. 167, No. 2, 2006, pp. 495–503.
- <sup>39</sup>Adler, R. J., “The Geometry of Random Fields,” *Wiley, London*, 1981.
- <sup>40</sup>Papoulis, A., “Random Variables, and Stochastic Processes,” 1990.
- <sup>41</sup>Morris, M. D., Mitchell, T. J., and Ylvisaker, D., “Bayesian Design and Analysis of Computer Experiments: Use of Derivatives in Surface Prediction,” *Technometrics*, Vol. 35, No. 3, 1993, pp. 243–255.
- <sup>42</sup>Yamazaki, W., Rumpfkeil, M. P., and Mavriplis, D. J., “Design Optimization Utilizing Gradient/Hessian Enhanced Surrogate Model,” *28th AIAA Applied Aerodynamics Conference*, Vol. 4363, 2010, p. 2010.
- <sup>43</sup>Han, Z.-H., Görtz, S., and Zimmermann, R., “Improving Variable-fidelity Surrogate Modeling via Gradient-enhanced Kriging and a Generalized Hybrid Bridge Function,” *Aerospace Science and Technology*, Vol. 25, No. 1, 2013, pp. 177 – 189.
- <sup>44</sup>Chung, H. and Alonso, J. J., “Using Gradients to Construct Cokriging Approximation Models for High-dimensional Design Optimization Problems,” *40th AIAA Aerospace Sciences Meeting & Exhibit*, Vol. 317, 2002, pp. 14–17.
- <sup>45</sup>Lukaczyk, T., Palacios, F., Alonso, J. J., and Constantine, P. G., “Active Subspaces for Shape Optimization,” *Proceedings of the 10th AIAA Multidisciplinary Design Optimization Conference*, 2014, pp. 1–18.
- <sup>46</sup>Osborne, M. A., Garnett, R., and Roberts, S. J., “Gaussian Processes for Global Optimization,” *3rd International Conference on Learning and Intelligent Optimization (LION3)*, Citeseer, 2009, pp. 1–15.
- <sup>47</sup>Koistinen, O.-P., Maras, E., Vehtari, A., and Jónsson, H., “Minimum Energy Path Calculations with Gaussian Process Regression,” *Nanosystems: Physics, Chemistry, Mathematics*, Vol. 7, No. 6, 2016.
- <sup>48</sup>Ahmed, M. O., Shahriari, B., and Schmidt, M., “Do We Need “Harmless” Bayesian Optimization and “First-Order” Bayesian Optimization?” *NIPS BayesOpt*, 2016.
- <sup>49</sup>Scott, W., Frazier, P. I., and Powell, W., “The Correlated Knowledge Gradient for Simulation Optimization of Continuous Parameters Using Gaussian Process Regression,” *SIAM Journal on Optimization*, Vol. 21, No. 3, 2011, pp. 996–1026.